


DESCRIPTION

- Mainly used for event timing, speaking time control ...
- Counting up/down with Style 5S, 10S and 12S clocks.
- Local time or timer/stopwatch display.
- **Hour - minute - second** from 0 to 23 : 59 : 59.
- Counting up/down and clock/chronometer mode selector.
- Functions: start, stop, split time, pre-selection, reset.
- The BT Chrono has a relay that is activated at the end the count (up or down). This relay (8A 250V) can be used to activate an indicator light or a buzzer (not supplied).

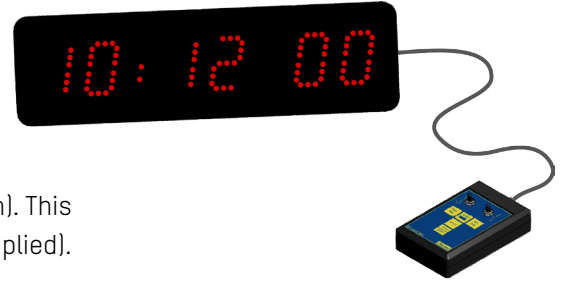

STANDARDS

- EMC: - EN55032.
- EN55024.
- LVD: EN60950.
- RED (radio models): EN301-489-3.

GENERAL FEATURES

- **Keys description**..... - A chronometer/clock display mode selector switch.
- A counting up/down mode selector switch.
- Two keys H and M for hour/minute pre-selection in counting down mode.
- A reset key: reset of the chronometer in stop mode.
- A split key for intermediate time display during 5 seconds.
- A start/stop key: successive pressing for start/stop of the chronometer.
- **Control**..... Up to 10 clocks.

MECHANICAL FEATURES


- **Operating temperature range**..... 0 to +50°C.
- **Protection Index**..... IP54.
- **Weight**..... 180 g.

ELECTRICAL FEATURES

- **Connection**..... To the clock with a 2-pair 5/10th SYT cable (20m max.).
- **Power supply**..... By the clock.
- **Consumption**..... 20 mA.

BT CHRONO REFERENCES Hour-Minute-Second

- **936 400**..... Timer control unit BT Chrono

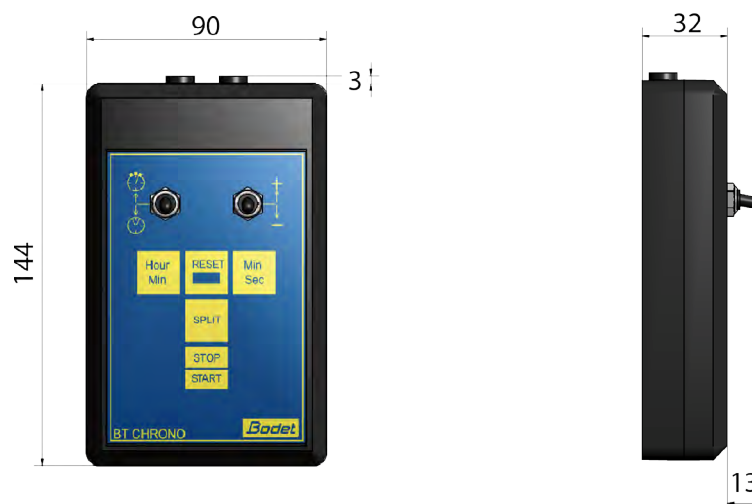

Dimensions in mm

Réf.: 643481101/18