


DESCRIPTION

- Designed for timing events, speaking times, operating rooms, etc.
- Timer/ Countdown with Style 5S, 10S and 12S clocks.
- Displays the time or the stopwatch.
- **Minute/second** display from 0 to 59.
- Select time/ stopwatch mode and timer/ countdown.
- Features: start, stop, split times, preselection, reset.
- The BT Chrono has a relay that is triggered at the end of the timing/ countdown.
This relay (8A 250V) sets off a warning light or sound (not provided).

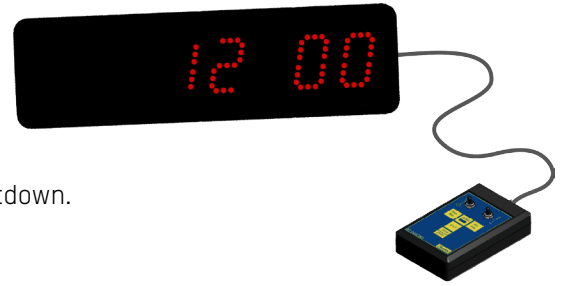

STANDARDS

- EMC: - EN55032.
- EN55024.
- LVD: EN60950.
- RED (radio models): EN301-489-3.

GENERAL FEATURES

- **Keys description**..... - A chronometer/clock display mode selector switch.
- A counting up/down mode selector switch.
- Two keys M and S for minute/second pre-selection in counting down mode.
- A reset key: reset of the chronometer in stop mode.
- A split key for intermediate time display during 5 seconds.
- A start/stop key: successive pressing for start/stop of the chronometer.
- **Control**..... Up to 10 clocks.

MECHANICAL FEATURES

- **Operating temperature range**..... 0 to +50°C.
- **Protection Index**..... IP54.
- **Weight**..... 380 g.

ELECTRICAL FEATURES

- **Connection**..... To the clock with a 2-pair 5/10th SYT cable (20m max.).
- **Power supply**..... By the clock.
- **Consumption**..... 20 mA.

BT CHRONO REFERENCES Minute-Second

- **936 403**..... BT Chrono minute/second stopwatch console



Dimensions in mm

Réf.: 643691B 01/18